




TECHNICAL DATA

Insulation Material	PPO
Contact Material	Copper, Tin plated
Suitable Current	30A
Rated Voltage	1000V (TUV) 600V (UL)
Test Voltage	8KV (TUV50HZ,1min)
Contact Resistance	<0.5mΩ
Degree Of Protection	IP 67
Ambient Temperature Range	40°C~ +85°C
Flame Class	UL 94 V0
Safety Class	II
Pin Dimensions	ø4mm

PRODUCT DIMENSIONS

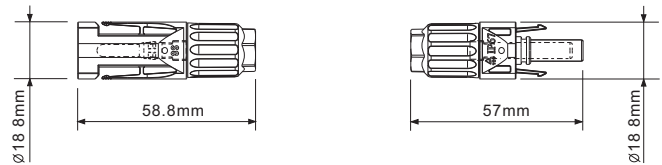

Conductor cross section	14 / 12 / 10 AWG 2.5 / 4.0 / 6.0 mm ²
-------------------------	--

MAIN SPECIALITY

- >> All the connection made by double fixed connection
- >> low power loss
- >> With the capacity of anti-aging and resistance to ultraviolet radiation on the outer cover
- >> With convenient installation, strong commonality
- >> To meet the using requirement under bad outdoor condition